

SUNHEART CERAMIX

TILES | BATHWARE | ADHESIVE



20^x & 30^x & 60^x
152 152 152

STEP & RISER SERIES
FULLBODY VITRIFIED TILES

LIGHT SERIES-ELENA


**STEP
RISER
SERIES**



300x1520mm



200x1520mm

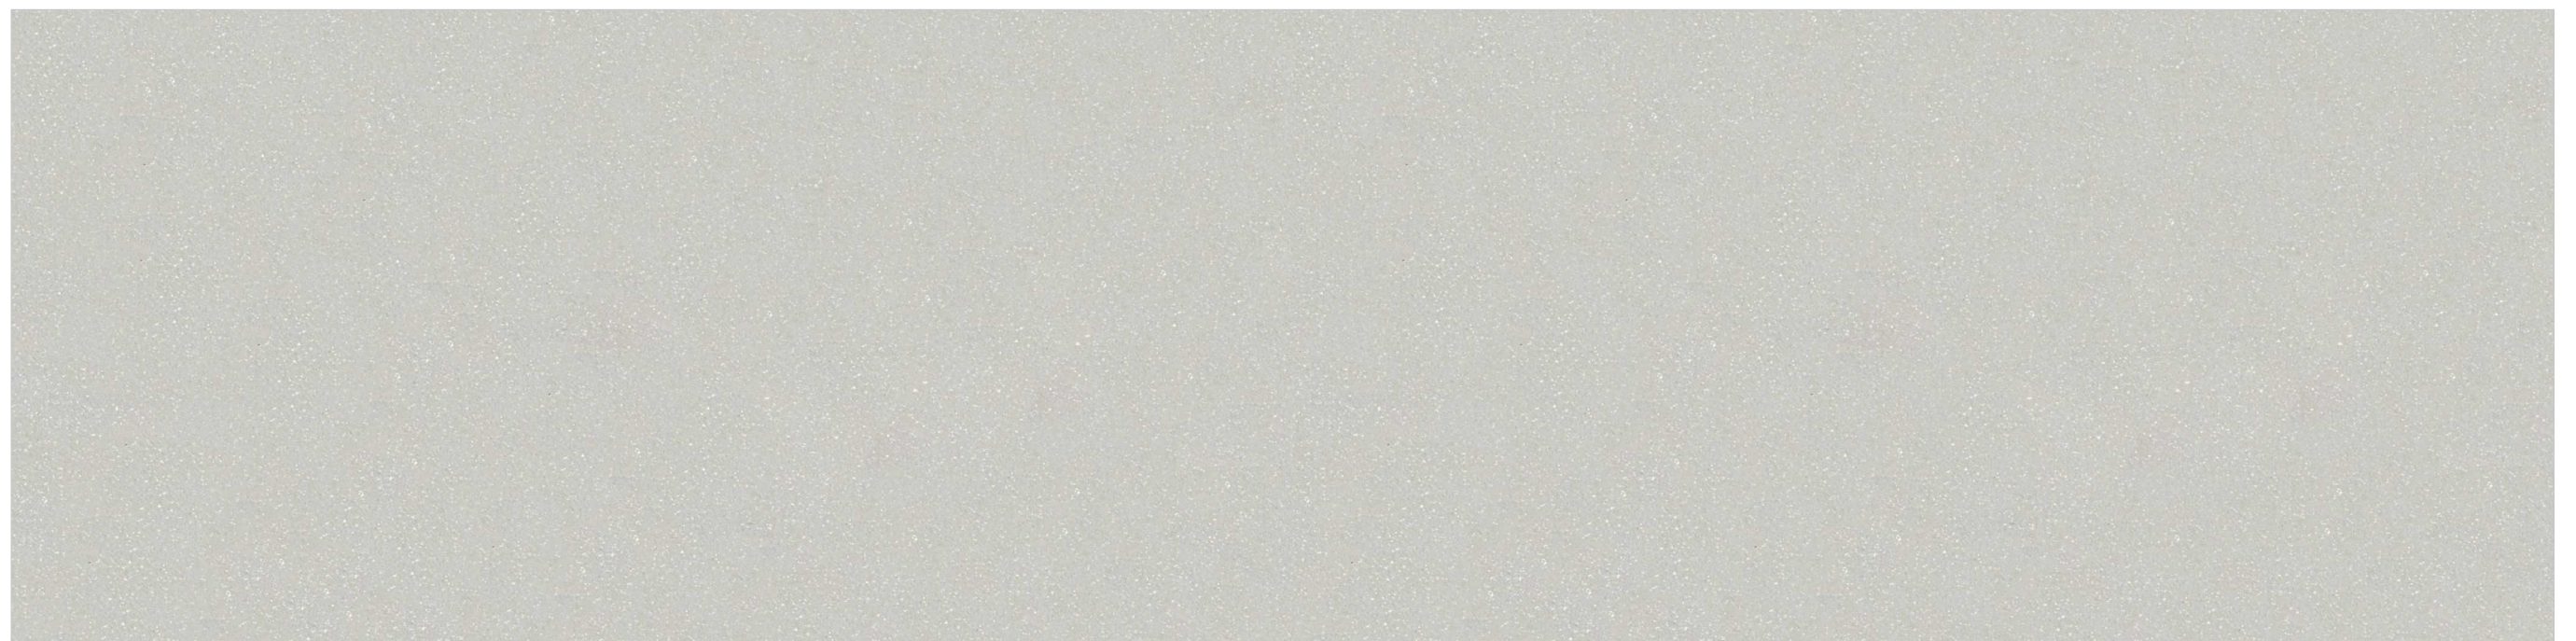

605x1520mm



Floor
Tiles



Matt
Finish



Water
Proof



LIGHT-PEBBLES

**STEP
RISER
SERIES**



300x1520mm



200x1520mm



605x1520mm



Floor
Tiles



Matt
Finish



Water
Proof



LIGHT-SANDY SAHARA


**STEP
RISER
SERIES**



300x1520mm



200x1520mm

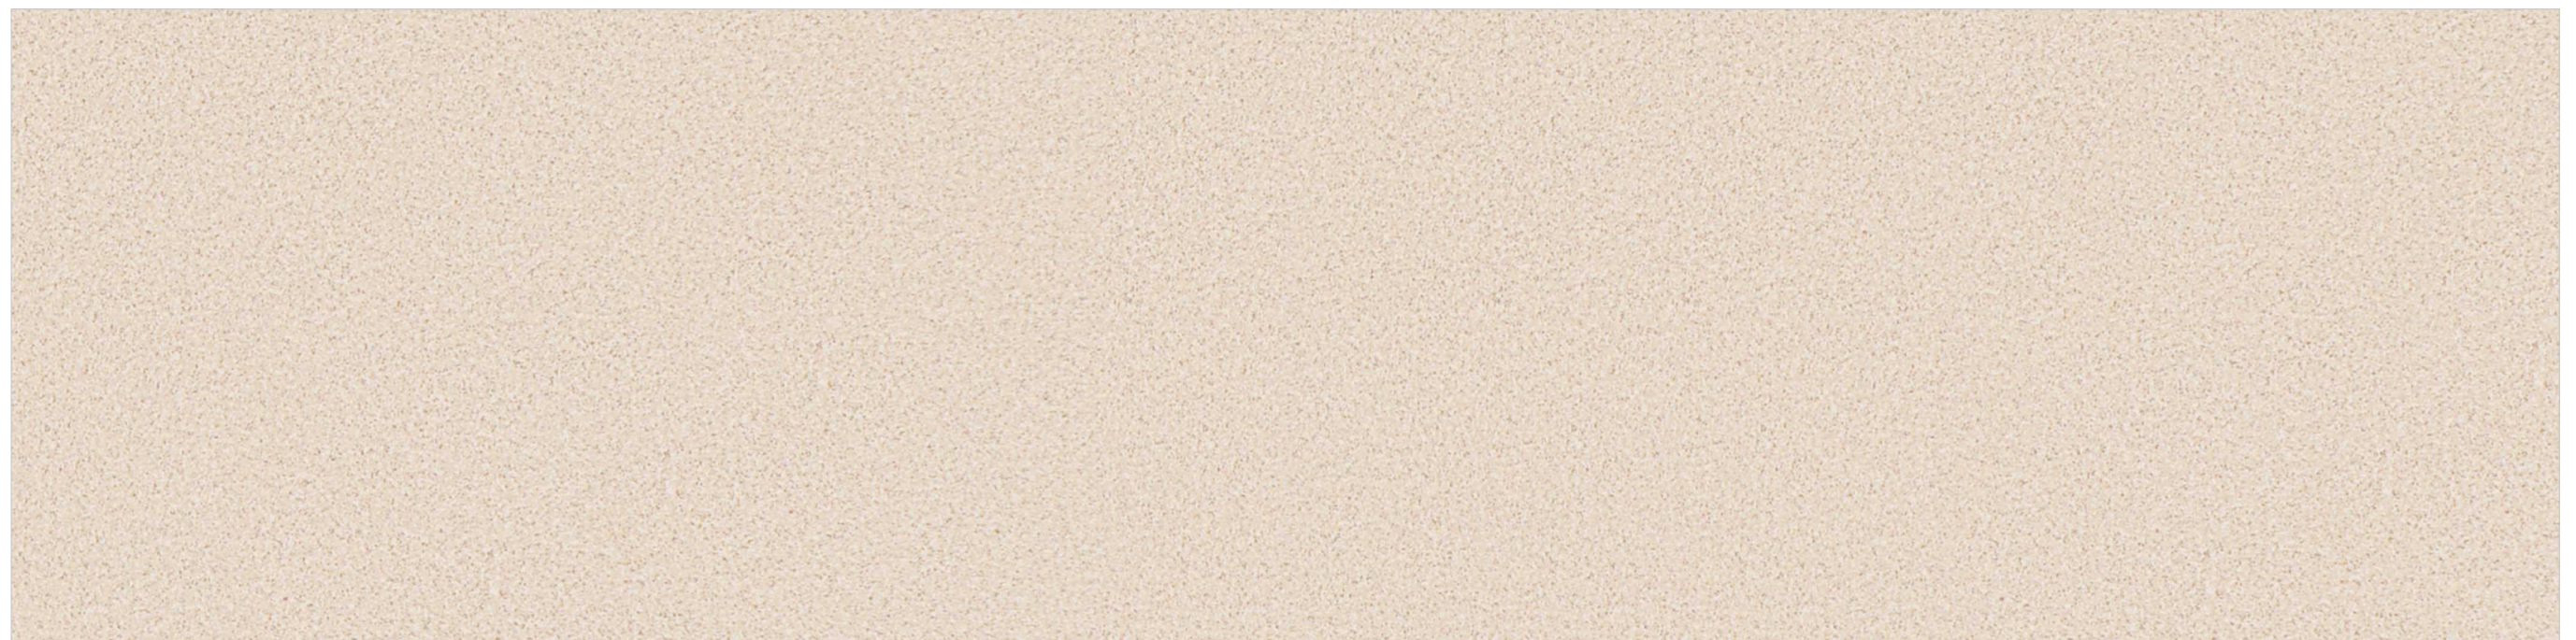

605x1520mm



Floor
Tiles



Matt
Finish




Water
Proof




FULLBODY VITRIFIED TILES

DARK-SANDY NERO


**STEP
RISER
SERIES**

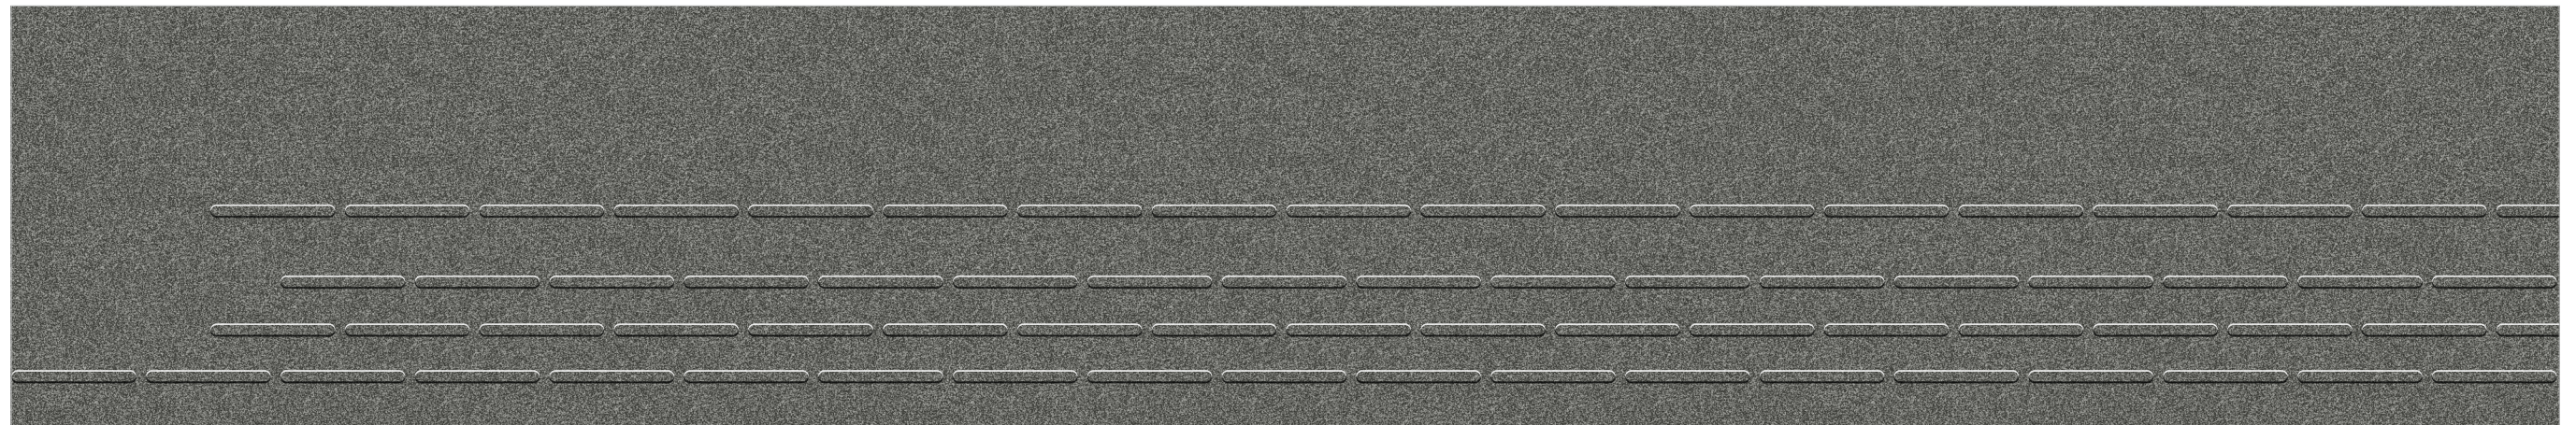

300x1520mm

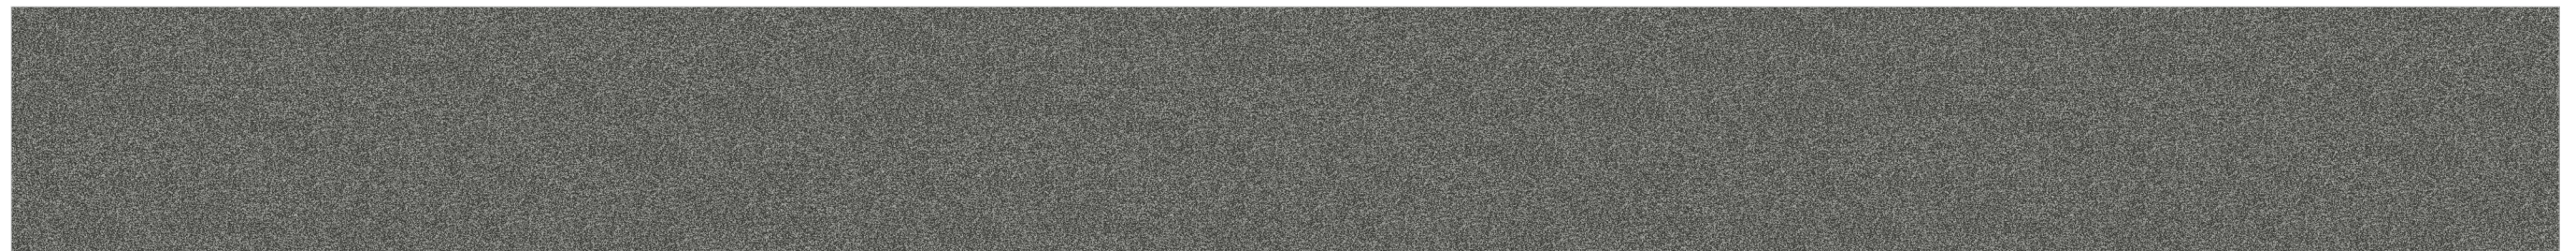

200x1520mm

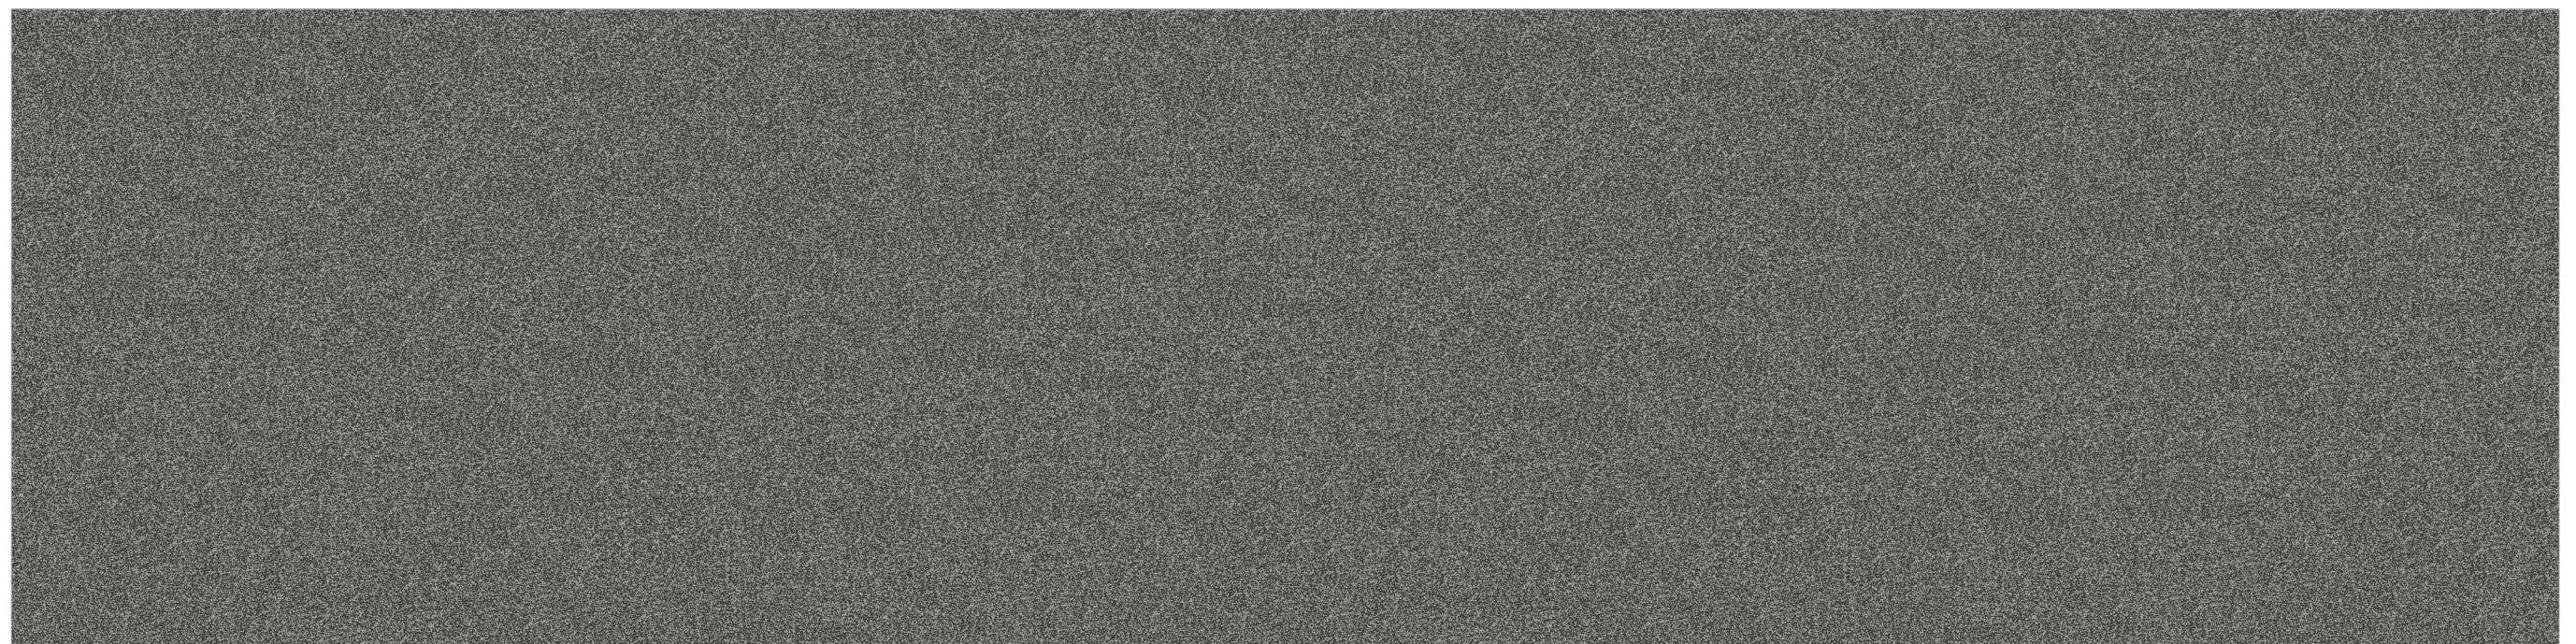

605x1520mm



Floor
Tiles



Matt
Finish




Water
Proof




FULLBODY VITRIFIED TILES

DARK-SANDY KOTA

**STEP
RISER
SERIES**

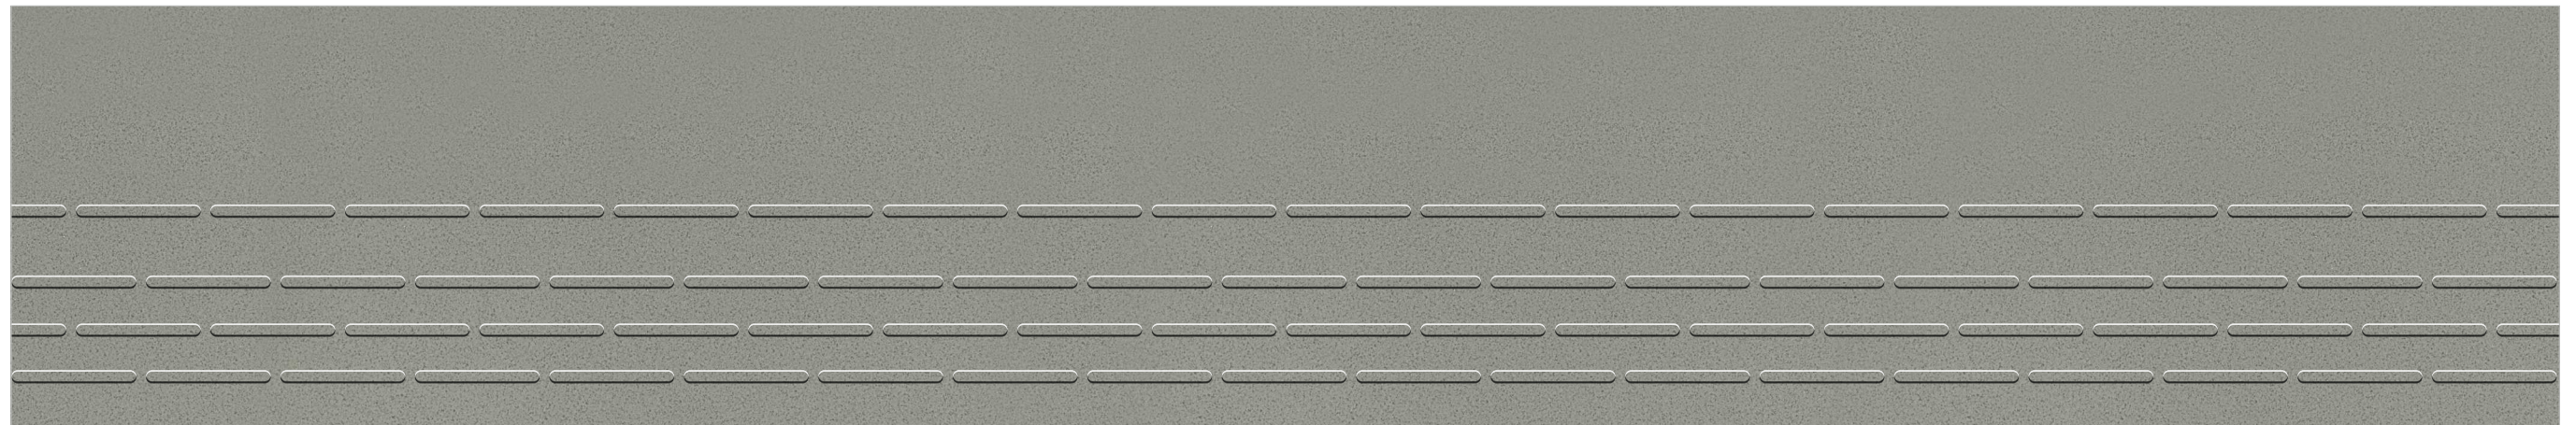

300x1520mm

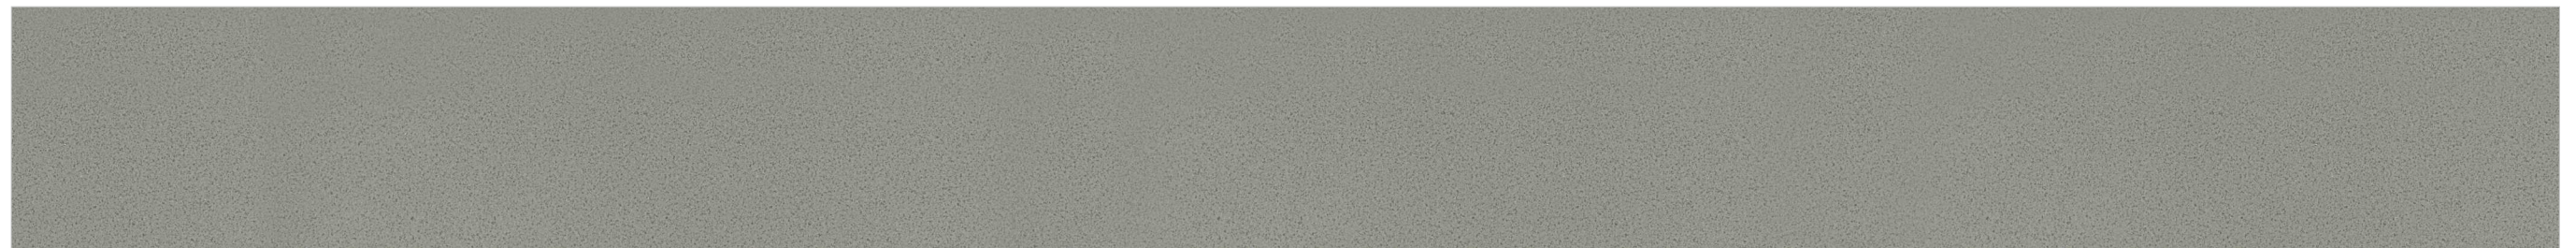

200x1520mm



605x1520mm



Floor
Tiles



Matt
Finish




Water
Proof



DARK-MIST


**STEP
RISER
SERIES**

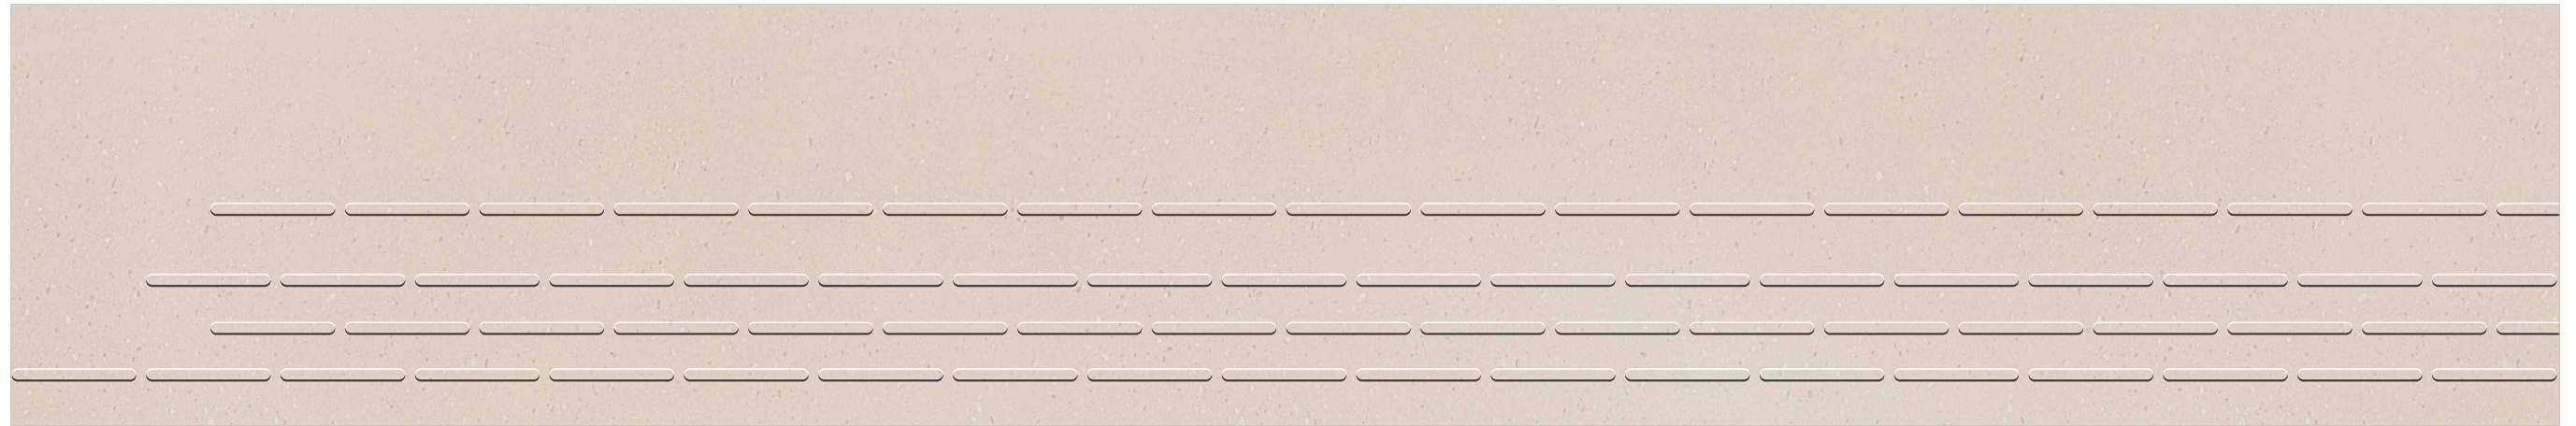

300x1520mm



200x1520mm

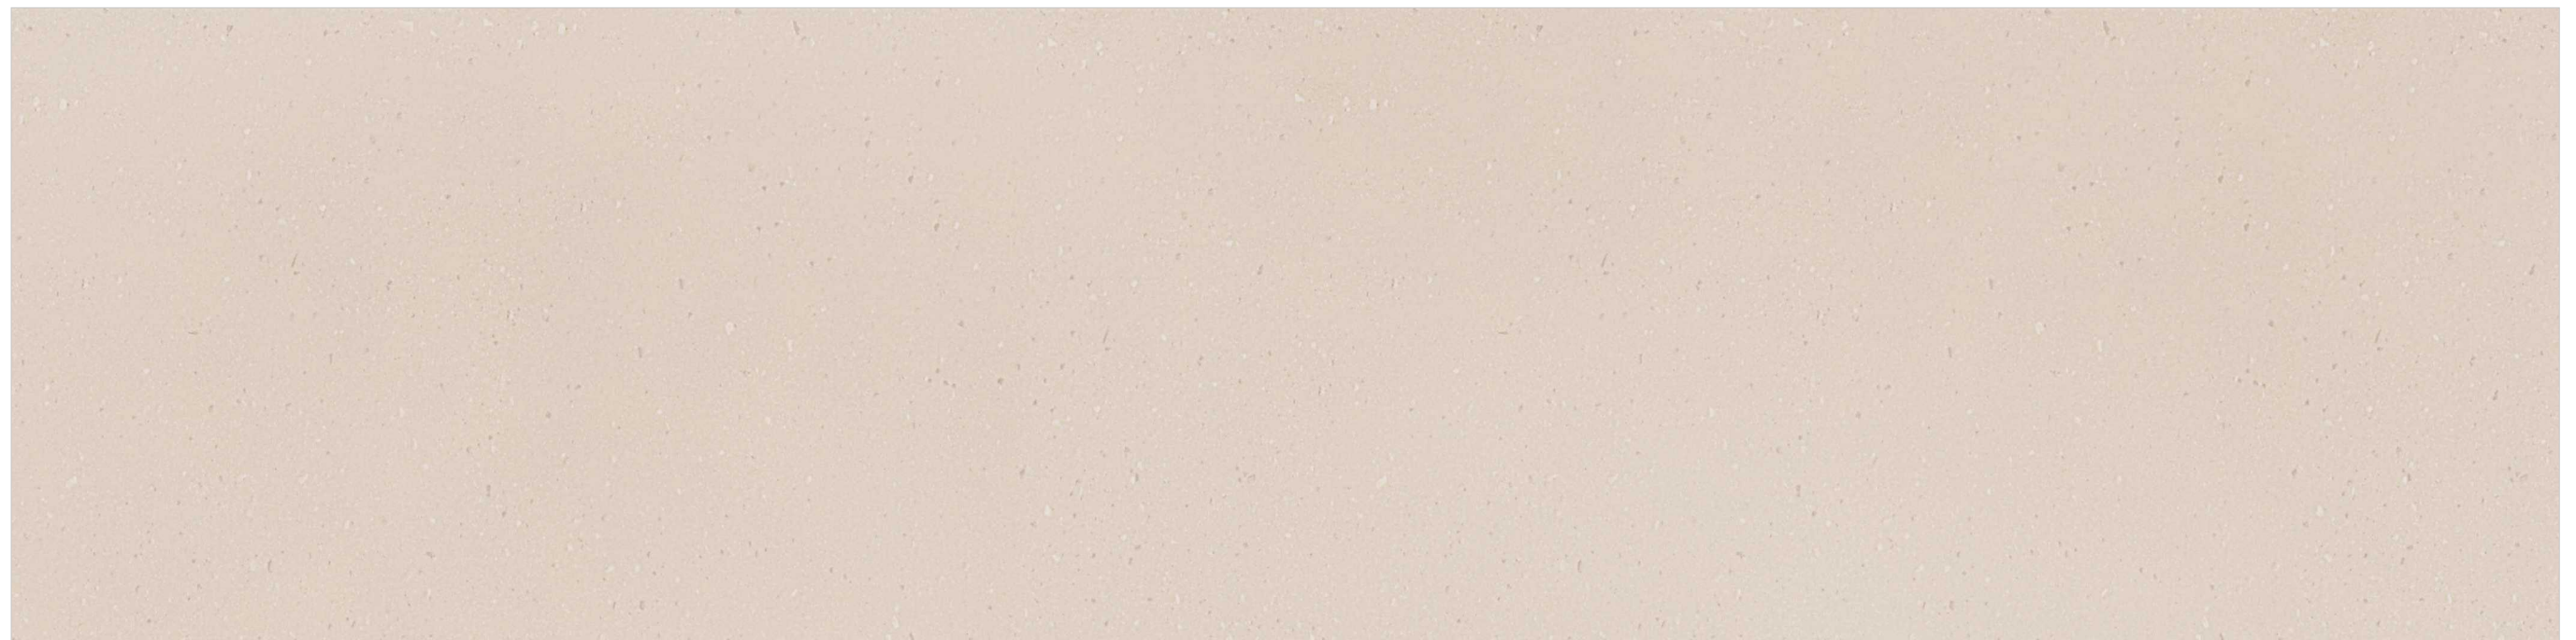

605x1520mm



Floor
Tiles



Matt
Finish



Water
Proof



DARK-SANDY CHOCO

**STEP
RISER
SERIES**



300x1520mm



200x1520mm



605x1520mm



Floor
Tiles



Matt
Finish



Water
Proof



FULLBODY VITRIFIED TILES

DARK-SLATE GREY

**STEP
RISER
SERIES**



300x1520mm



200x1520mm



605x1520mm



Floor
Tiles




Matt
Finish



Water
Proof

SPECIAL SERIES-ICONIC

**STEP
RISER
SERIES**

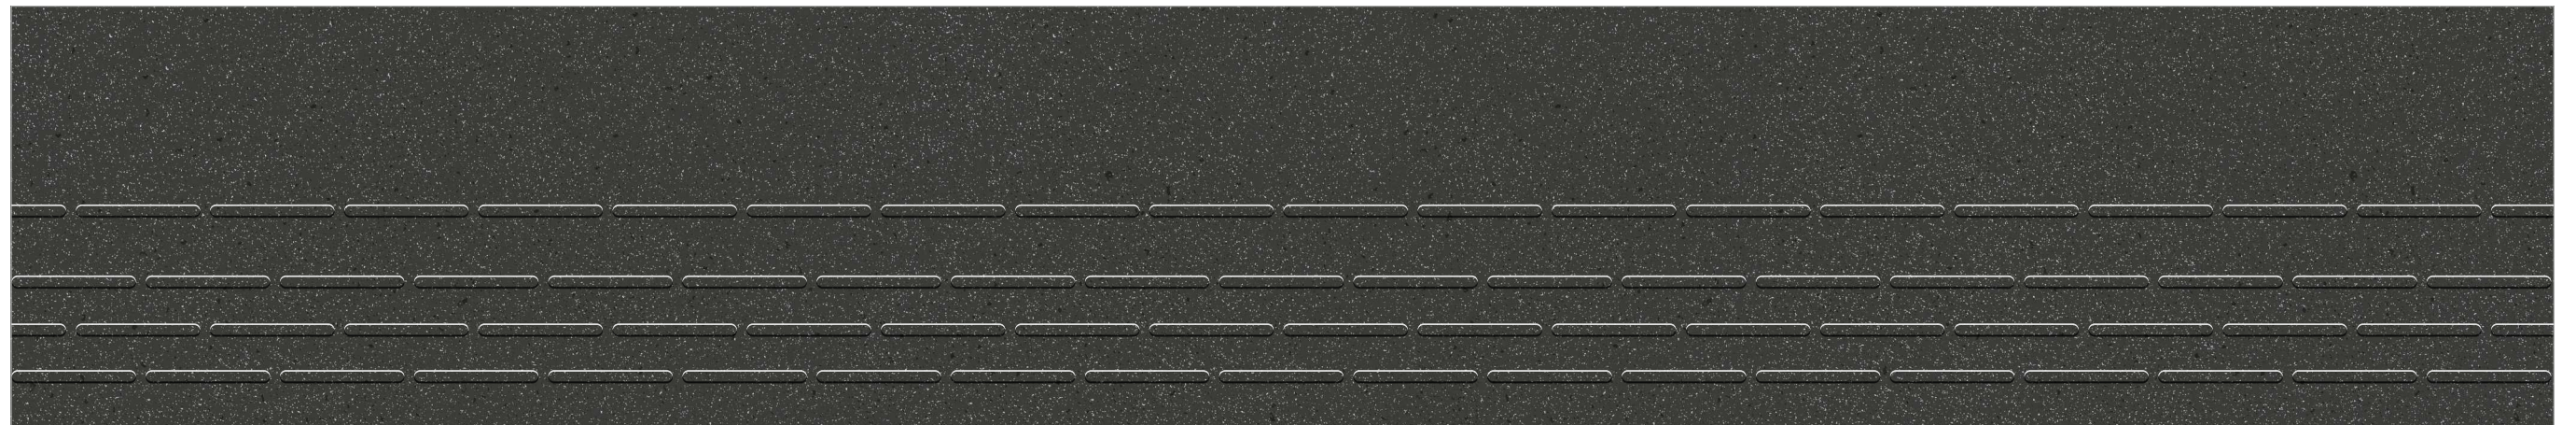

300x1520mm



200x1520mm



605x1520mm



Floor
Tiles



Matt
Finish



Water
Proof



TECHNICAL SPECIFICATION

TECHNICAL DETAILS	STANDARD AS PER ISO-13006/EN176 GROUP BIa	MEAN VALUE OF OUR FULL BODY VITRIFIED TILES	METHOD OF TEST
Deviation In Length & Width	±0.60%	±0.10%	ISO-10545-2
Deviation In Thickness	±5.00%	±2.00%	ISO-10545-2
Straightness Of Sides	±0.50%	±0.10%	ISO-10545-2
Rectangularity	±0.60%	±0.10%	ISO-10545-2
Surface Flatness	±0.50%	±0.10%	ISO-10545-2
Glossiness	Gloss Meter	Min. 90%	Glossmeter
Water Absorption	≤0.50%	E≤0.05%	ISO-10545-3
Breaking Strength	1300 N	2000 N	ISO-10545-4
Abrasion Resistance	Max. 175mm ³	Max. 145mm ³	ISO-10545-6
Moh's Hardness	Min. 6	≥ 6*	EN 101
Frost Resistance	Frost Proof	Frost Proof	ISO-10545-12
Thermal Shock	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion	<9x10 ⁻⁶	≥ 6 x 10 ⁻⁶	ISO-10545-8
Resistance of House Hold Chemical	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistance	Resistance	ISO-10545-14
Slip Resistance (friction Co Efficient)	> 0.40	> 0.40	ISO-10545-17

DISCLAIMER :

We reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime. The colors of tiles shown in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors and references should be verified for typographical errors.

PACKING DETAILS

FULL BODY STEP AND RISER 5ft.			
SIZE	Sq.Ft.	Packing	Weight
605X1520	19.79	2 pic / Box	49 Kg. (Approx.)
300X1520	19.63	4 pic / Box	49 Kg. (approx.)
200X1520	13.09	4 pic / Box	32 Kg. (Approx.)