

**ARTISAN COLLECTION**  
CERAMIC WALL TILES  
150X150MM (GLOSSY)

# ARTISAN

COLLECTION

Step into a world of color with our exquisite tile collection, boasting six vibrant hues in a sleek 150x150mm size and shiny glossy finish that adds glamour in every space.




# ARTISAN

COLLECTION


---




**WHITE**

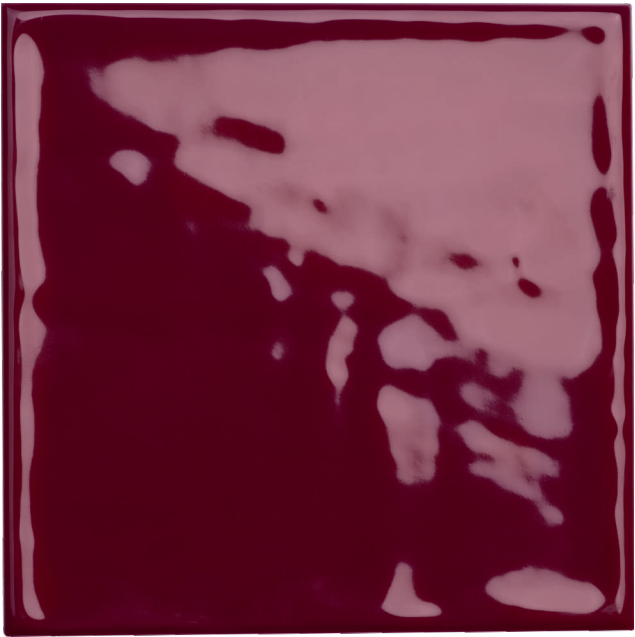


**WINE RED**

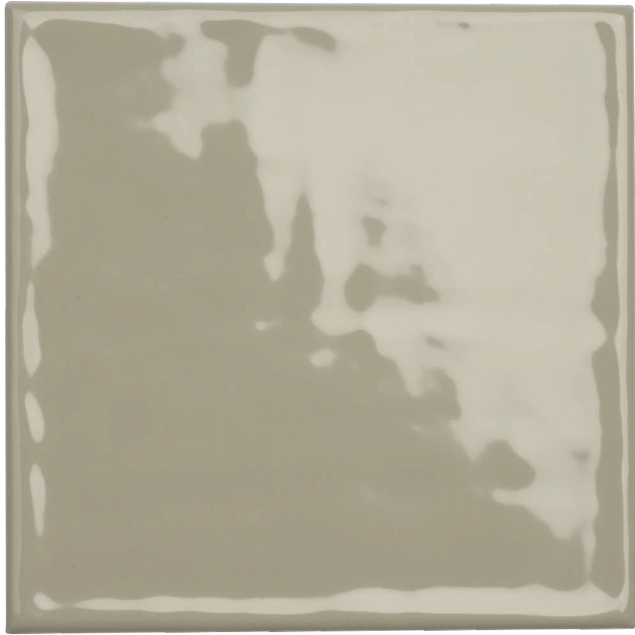


**SAND**

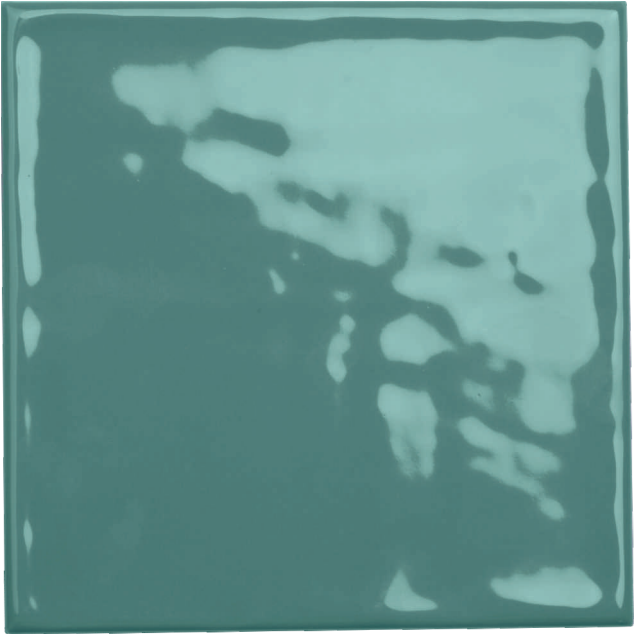

**TEAL GREEN**

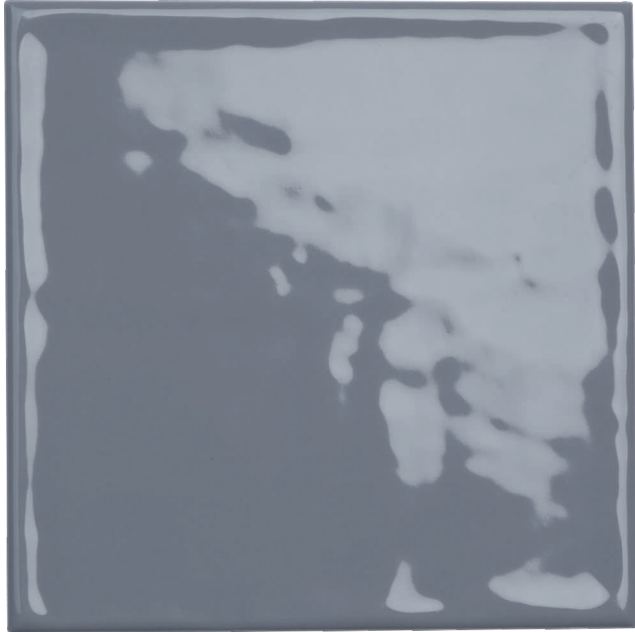

**GREY**

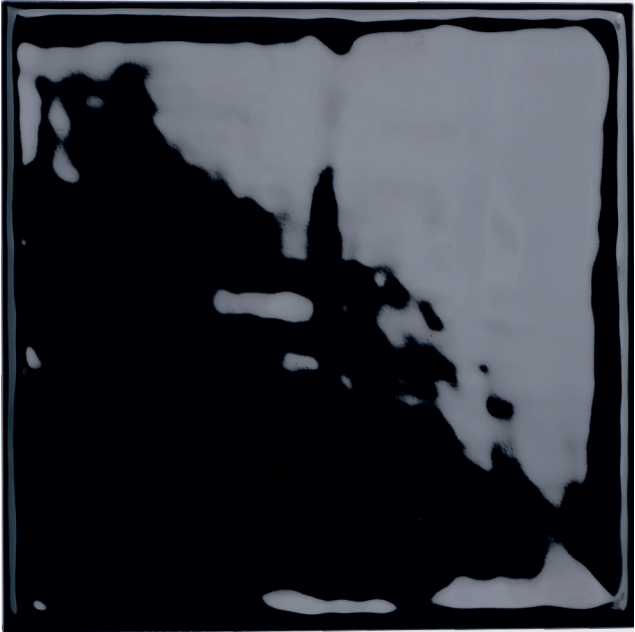

**BLACK**

---

SIZE.  
**150X150MM**

SURFACE  
**GLOSSY**



**WALL  
TILE**

---



WHITE

---



**GREY**

---



TEAL GREEN

---

# TECHNICAL SPECIFICATION as per ISO 13006:2018 – ANNEX L

Sr.No.	Property	International Std.	Our Tiles Value	Method of Testing
1	Deviation in Length and Width	± 0.6%	± 0.25%	ISO-10545-2
2	Deviation in Thickness	± 10%	± 1.17%	ISO-10545-2
3	Straightness of Sides	± 0.5%	± 0.14%	ISO-10545-2
4	Rectangularity	± 0.5%	± 0.10%	ISO-10545-2
5	Surface Flatness	± 0.5%	± 0.12%	ISO-10545-2
5	Water Absorption	>10%	13.82%	ISO-10545-3
6	MOR	Minimum 15 N/mm <sup>3</sup>	23.00 N/mm <sup>3</sup>	ISO-10545-4
7	Breaking Strength	Minimum 200 N	410.03 N	ISO-10545-4
8	Surface Quality	Minimum 95%	100%	ISO-10545-2
9	Density (g/cc)	Minimum 2.2	2.2352 g/cc	ISO-10545-3
10	Chemical Resistance	Minimum Class B	Class GA ( PASS )	ISO-10545-13
11	Crazing Resistance	2 cycle	2 cycle ( PASS ) Fully Resistance	ISO-10545-11
12	Thermal Shock Resistance	10 cycle	10 cycle ( PASS ) Fully Resistance	ISO-10545-9
13	Coefficient of Linear Thermal Expansion	Maximum 9 x 10 <sup>-6</sup>	5.34 x 10 <sup>-6</sup>	ISO-10545-8
14	Small colour differences (Plain Colour Tiles)	GL < 0.75	GL < 0.55	ISO-10545-16
15	Resistance to Staining	Min Class - 3	Class 5	ISO-10545-14
16	Resistance to Low Concentration of Acid & Alkali	Class GLA	Class GLA	ISO-10545-13
17	Resistance to Low Concentration of Acid & Alkali	Class GHA	Class GHB	ISO-10545-13
18	Household Chemical Resistance	Minimum Class B	Class GA	ISO-10545-13
19	Swimming Pool Salt	Minimum Class B	Class GA	ISO-10545-13
20	Lead and Cadmium Release	Maximum 0.1mg/dm <sup>2</sup>	0.019mg/dm <sup>2</sup>	ISO-10545-15

## PACKAGING DETAILS

SIZE	THICKNESS	PIECES/BOX	SQM./BOX	SQFT./BOX	KG/BOX
150X150MM (6"X6")	7.50MM	34	0.765	8.25	10.50

Note :

- Size / shade variation is inherent in ceramic tiles , in case of any complain its should be brought to our dealer's notice before laying the tiles.
- Colour shown are indicative only. Check actual tiles for exact colour.
- The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.
- Customers are advised to inspect a sample of the tile before ordering.
- The company reserves the right to change the specifications without prior notice.

### Exterior Elevation or interior Walls



